




Solenoid Valve

Cleaning burrs with most advantaged electrolysis technology makes inner surface finishing arrive at very high level, and Japanese seals act as another big support for long life cycles of E·MC valves. 64 valve bodies are machined simultaneously in completely computer controlled CNC machine, coils are tested with 20,000 volts experiment condition, and armatures are well provided by 3-D CNC machine imported from Japan, all these makes E·MC valves top in China.





How to Order?

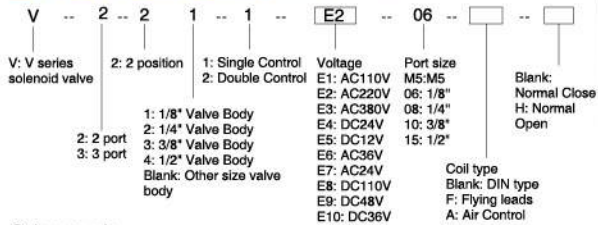

型号:
CN1V251-06
CN2V251-08
CN3V251-10
CN4V251-15


Order example:

- * V series, 2 port, 2 position, other size valve body, single Control, AC110V, 1/8" port size, DIN coil, Model: V221E1-06
- * V series, 3 port, 2 position, other size valve body, single Control, AC110V, 1/8" port size, flying leads coil, Model: V321E1-06

V Series Solenoid Valve (2/2,3/2)




V Series Air Control Valve (3/2)

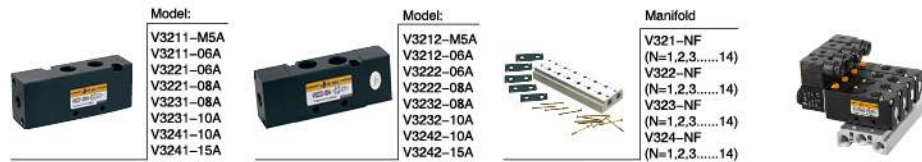

M Series Solenoid Valve



How to Order?

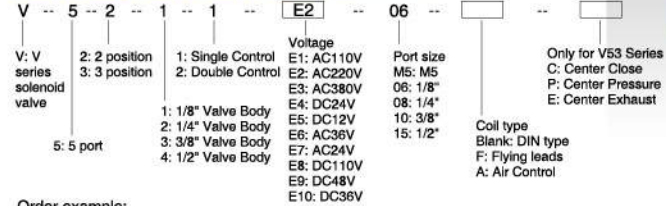

型号:
CN1V251-06
CN2V251-08
CN3V251-10
CN4V251-15


Order example:

- * V series, 5 port, 2 position, single control, 1/8" valve body, AC110V, 1/8" port size, DIN coil, Model: V5211E1-06
- * V series, 5 port, 2 position, double control, 1/8" valve body, AC220V, 1/8" port size, flying Leads coil, Model: V5212E2-06F
- * V series, 5 port, 3 position, double control, 1/8" valve body, DC24V, 1/8" port size, DIN coil, center close, Model: V5312E4-06C

5 Port 2 Position Valve




5 Port 3 Position Valve

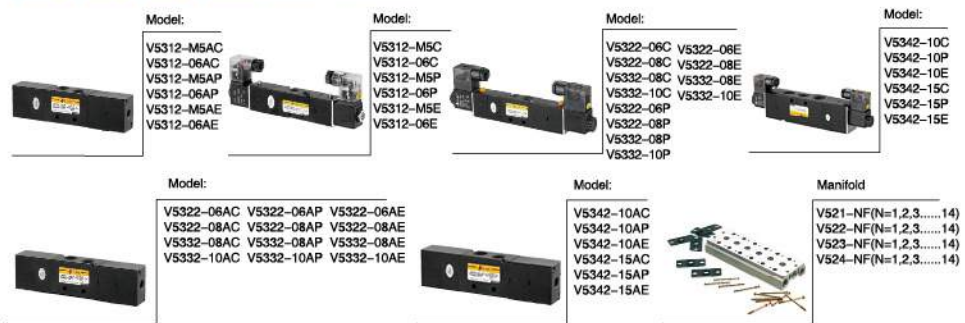



How to Order?

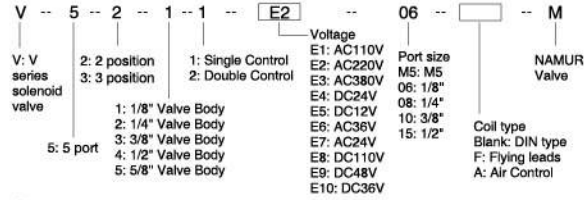


Order example:
 * V series, 5 port, 2 position, single control, 1/8" valve body, AC110V, 1/8" port size, DIN coil, Model: V5211E1-06M
 * V series, 5 port, 2 position, double control, 1/8" valve body, AC220V, 1/8" port size, flying leads coil, Model: V5212E2-06FM

Namur Valve

★ ISO Standard Namur Valve

 Model: V5211-M5M V5211-06M	 Model: V5221-06M V5221-08M V5231-06M★ V5231-08M★ V5231-10M V5241-15M V5251-10M★ V5251-15M★	 Model: V5212-M5M V5212-06M
 Model: V5222-06M V5222-08M V5232-06M★ V5232-08M★ V5232-10M V5242-15M V5252-10M★ V5252-15M★	 Model: V3211-M5M V3211-06M	 Model: V3221-06M V3221-08M V3231-06M★ V3231-08M★ V3231-10M V3241-15M V3251-10M★ V3251-15M★
 Model: V3211-M5AM V3211-06AM V3221-06AM V3221-08AM V3231-06AM★ V3231-08AM★ V3231-10AM V3241-15AM V3251-10AM★ V3251-15AM★	 Model: V5211-M5AM V5211-06AM V5221-06AM V5221-08AM V5231-06AM★ V5231-08AM★ V5231-10AM V5241-15AM V5251-10AM★ V5251-15AM★	 Model: V5212-M5AM V5212-06AM V5222-06AM V5222-08AM V5232-06AM★ V5232-08AM★ V5232-10AM V5242-15AM V5252-10AM★ V5252-15AM★
 Model: V5312-M5AMP V5312-06AMP V5312-06AMC V5312-06AMC V5312-06AMC V5322-06AMP V5322-06AMC V5322-06AMC V5322-06AMC V5322-06AME V5322-08AMP V5322-08AMC V5322-08AMC V5322-08AME V5322-08AMP V5322-08AMC V5322-10AMC V5322-08AME V5332-06AMP★ V5342-15AMP V5342-15AMC V5342-15AME V5352-10AMP★ V5352-10AMC★ V5352-10AME★ V5352-10AMP★ V5352-10AMC★ V5352-15AMP★ V5352-15AMC★ V5352-15AME★	 Model: V5312-M5MP V5312-06MP V5312-06MC V5312-06MC V5312-06MC V5322-06MP V5322-06MC V5322-06MC V5322-06MC V5322-06ME V5322-08MP V5322-08MC V5322-08MC V5322-08ME V5332-06MP★ V5332-06MC★ V5332-06MC★ V5332-06MC★ V5332-06ME★ V5332-08MP★ V5332-08MC★ V5332-08MC★ V5332-08ME★ V5332-10MP V5332-10MC V5332-10MC V5332-10ME V5342-15MP V5342-15MC V5342-15ME	 Model: V5312-M5MP V5312-06MP V5312-06MC V5312-06MC V5312-06MC V5322-06MP V5322-06MC V5322-06MC V5322-06MC V5322-06ME V5322-08MP V5322-08MC V5322-08MC V5322-08ME V5332-06MP★ V5332-06MC★ V5332-06MC★ V5332-06MC★ V5332-06ME★ V5332-08MP★ V5332-08MC★ V5332-08MC★ V5332-08ME★ V5332-10MP V5332-10MC V5332-10MC V5332-10ME V5342-15MP V5342-15MC V5342-15ME

How to Order?



order example:
 * S series, 5 Port, 2 position, 1/4" body, single control with flying leads, AC220V, 1/4" thread size, Model: S5221E2-08F
 * S series, 5 Port, 2 position, 3/8" body, double control, 3/8" thread size, air control, Model: S5232-10A

 Model: S5221-08F S5231-10F	 Model: S5221-08D S5231-10D	 Model: S5221-08DL S5231-10DL
 Model: S5222-08F S5232-10F	 Model: S5222-08D S5232-10D	 Model: S5222-08DL S5232-10DL
 Model: S5322-08FC S5322-08FE S5322-08FP S5332-10FC S5332-10FE S5332-10FP	 Model: S5322-08DC S5322-08DE S5322-08DP S5332-10DC S5332-10DE S5332-10DP	 Model: S5322-08DLC S5322-08DLE S5322-08DLP S5332-10DLC S5332-10DLE S5332-10DLP
 Model: S5221-08A S5231-10A	 Model: S5222-08A S5232-10A	 Manifold S522-NF (N=1,2,3,.....14) S523-NF (N=1,2,3,.....14)

M221 Series

Type: 2/2 Port Size: 1/8" Working Pressure: 0-8Bar Working Temperature: -5-80°C



MJ322 Series

Type: 3/2 Port Size: 1/4" Working Pressure: 0-8Bar Working Temperature: -5-80°C



M322 Series

Type: 3/2 Port Size: 1/4" Working Pressure: 0-8Bar Working Temperature: -5-80°C



M522 Series

Type: 5/2 Port Size: 1/4" Working Pressure: 0-8Bar Working Temperature: -5-80°C



Hand Pull / Push Valve / Foot Valve / Flow Control Valve / Rotary Valve / Shuttle Valve / Quick Exhaust Valve / One Way Valve / Slide Valve / Pressure Increase Valve

Hand Pull Valve

Working Pressure: 0-8Bar Working Temperature: -5-80°C



Flow Control Valve

Working Pressure: 0-8Bar Working Temperature: -5-80°C



Hand Push Valve

Working Pressure: 0-8Bar Working Temperature: -5-80°C



Foot Valve

Port Size: 1/4" Working Pressure: 0-8Bar Working Temperature: -5-80°C



Rotary Valve

Type: 4/3 Working Pressure: 0-8Bar Working Temperature: -5-80°C



Shuttle Valve

Quick Exhaust Valve

One Way Valve

Slide Valve

Pressure increase Valve

Working Pressure: 1.5-10Bar Working Temperature: -5-60°C

